

Please Contact

Panasonic®


Panasonic Life Solutions Middle East & Africa
Division of Panasonic Marketing Middle East & Africa FZE
P.O Box 17985, Dubai, U.A.E Tel:+971 8007262 | customer-care@ae.panasonic.com | www.panasonic.com



Panasonic

LED

ILLUMINATION THAT INSPIRES
LED LIGHTING

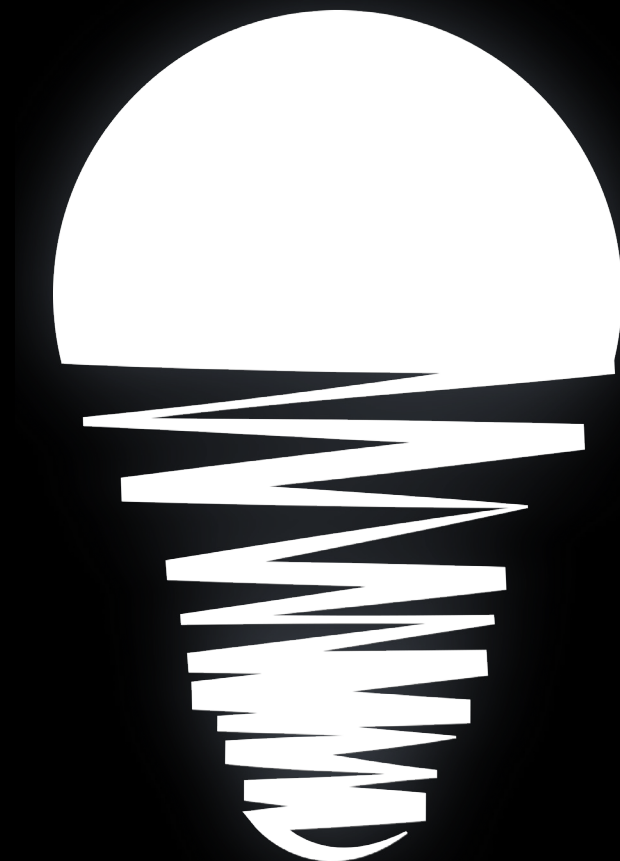




LED Bulb

Aesthetically designed Spherical LED Bulb for B22 & E27 lamp base.

Input Voltage: 100-240V AC, 50/60Hz
Driver Type: Integral
Voltage Surge Protection: 1 KV
CRI: Ra>80
LED Life: 15,000 BH
Optics: Polycarbonate diffuser for better light distribution

- Anti-glare Diffuser
- Excellent CRI
- Robust Design
- Long Life
- Eco-Friendly
- Zero Maintenance
- No UV & IR Radiation
- No Mercury
- For indoor use only



150°
Ra >80
IP 20

Application areas

- Living Room
- Corridors
- Shops
- Offices
- Staircase



Wattage	Product Description	CCT	Lumen output	Cut out dimension	Power factor	Color Rendering Index (Ra)	Dimension (mm)		Product code
							Diameter	H	
3W	LED Bulb - B22	3000K	250	NA	>0.4	>80	45	75	PBUM16033
	LED Bulb - B22	6500K	250	NA	>0.4	>80	45	75	PBUM16037
5W	LED Bulb - B22	3000K	470	NA	>0.5	>80	60	111	PBUM16053
	LED Bulb - B22	6500K	470	NA	>0.5	>80	60	111	PBUM16057
7W	LED Bulb - B22	3000K	630	NA	>0.5	>80	60	111	PBUM16073
	LED Bulb - B22	6500K	630	NA	>0.5	>80	60	111	PBUM16077
9W	LED Bulb - B22	3000K	810	NA	>0.5	>80	60	111	PBUM16093
	LED Bulb - B22	6500K	810	NA	>0.5	>80	60	111	PBUM16097
12W	LED Bulb - B22	3000K	1080	NA	>0.7	>80	60	118	PBUM16123
	LED Bulb - B22	6500K	1080	NA	>0.7	>80	60	118	PBUM16127
15W	LED Bulb - B22	3000K	1350	NA	>0.7	>80	70	127	PBUM16153
	LED Bulb - B22	6500K	1350	NA	>0.7	>80	70	127	PBUM16157
3W	LED Bulb - E27	3000K	250	NA	>0.4	>80	45	77	PBUM17033
	LED Bulb - E27	6500K	250	NA	>0.4	>80	45	77	PBUM17037
5W	LED Bulb - E27	3000K	470	NA	>0.5	>80	60	112	PBUM17053
	LED Bulb - E27	6500K	470	NA	>0.5	>80	60	112	PBUM17057
7W	LED Bulb - E27	3000K	630	NA	>0.5	>80	60	112	PBUM17073
	LED Bulb - E27	6500K	630	NA	>0.5	>80	60	112	PBUM17077
9W	LED Bulb - E27	3000K	810	NA	>0.5	>80	60	112	PBUM17093
	LED Bulb - E27	6500K	810	NA	>0.5	>80	60	112	PBUM17097
12W	LED Bulb - E27	3000K	1080	NA	>0.7	>80	60	120	PBUM17123
	LED Bulb - E27	6500K	1080	NA	>0.7	>80	60	120	PBUM17127
15W	LED Bulb - E27	3000K	1350	NA	>0.7	>80	70	129	PBUM17153
	LED Bulb - E27	6500K	1350	NA	>0.7	>80	70	129	PBUM17157



LED Down Light

Recess mounted Circular type
LED Down Light in white finish with
energy efficient electronic driver.
Input Voltage: 220-240V AC, 50/60Hz
Driver Type: Integral
P.F ≥ 0,5
Voltage Surge Protection: 1KV
CRI: Ra>80
LED Life: 25,000 BH
Optics: Polycarbonate diffuser for better light
distribution

- Anti-glare
Diffuser

Excellent
CRI

Robust Design

Long Life

Eco-Friendly

Zero
Maintenance


No UV &
IR Radiation

No Mercury

For indoor use only

Application areas

- Living Room
- Corridors
- Shops
- Offices
- Staircase

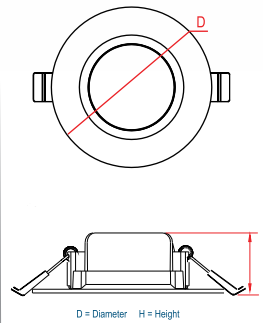

Lens Type

- 60°
- Ra >80
- IP 20

Diffuser Type

- 120°
- Ra >80
- IP 20





Recess / Surface Downlight

Surface frame is separate accessory available on demand



Recess mounted Circular type
LED Down Light in white finish with
energy efficient electronic driver
available with surface frame as accessory

Input Voltage: 220-240V AC
Driver Type: Non-Isolated, Integral
P.F ≥ 0.4 for 3W & P.F ≥ 0.9 for 9, 15 & 20W
Voltage Surge Protection: 1KV
CRI: Ra>80
LED Life: 20,000 BH
Optics: Polycarbonate diffuser for better light distribution
Accessories : Surface Frame (Not available in 3W)

Beam angle : 110°



Application areas

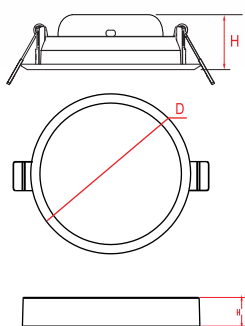

Diffuser Type



Downlight

Surface Frame

Wattage	Product Description	CCT	Lumen output	Cut out dimension mm	Color Rendering Index (Ra)	Dimension (mm)		Product code
						Diameter	H	
3W	LED Panel Down Light Round	3000K	240	65	>80	82	36	PDLM30033
	LED Panel Down Light Round	4000K	240	65	>80	82	36	PDLM30034
	LED Panel Down Light Round	6500K	240	65	>80	82	36	PDLM30037
9W	LED Panel Down Light Round	3000K	720	105	>80	116	36	PDLM30093
	LED Panel Down Light Round	4000K	720	105	>80	116	36	PDLM30094
	LED Panel Down Light Round	6500K	720	105	>80	116	36	PDLM30097
15W	LED Panel Down Light Round	3000K	1275	155	>80	166	36	PDLM30153
	LED Panel Down Light Round	4000K	1350	155	>80	166	36	PDLM30154
	LED Panel Down Light Round	6500K	1350	155	>80	166	36	PDLM30157
20W	LED Panel Down Light Round	3000K	1700	205	>80	220	36	PDLM30203
	LED Panel Down Light Round	4000K	1800	205	>80	220	36	PDLM30204
	LED Panel Down Light Round	6500K	1800	205	>80	220	36	PDLM30207

Plastic Surface Frame		
Wattage	Product Description	Product code
9W	LED Plastic Surface Frame, Round Shape	PFMM04090
15W	LED Plastic Surface Frame, Round Shape	PFMM04150
20 W	LED Plastic Surface Frame, Round Shape	PFMM04200




Base Light

Ultra slim edge lit type LED luminaire with aluminium housing, anti glare diffuser and separate energy efficiency electronic driver.

Input Voltage : 220-240V AC, 50/60Hz
High Performance electronic driver ensure Zero Maintainance, 40W
High Surge Protection : 1KV
Average Life L70B50 : 50000 hrs
High transmittance MS diffuser for glare-free symmetric light distribution
No harmful UV & IR radiations
Operating Temperature : -10°C to +45°C

-  Anti-glare Diffuser
-  Excellent CRI
-  Robust Design
-  Long Life
-  Eco-friendly
-  Zero Maintenance
-  No UV & IR Radiation
-  No Mercury
-  For indoor use only

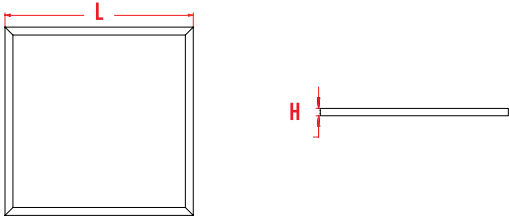

Application areas

- Corporate Offices
- Modern Workspaces
- Banks
- Conference
- Software Centres
- Hospitals



Product Description	CCT	Lumen output	Cut out dimension	Color Rendering Index (Ra)	Dimension (mm)			Product code
					L	W	H	
LED 2X2 Base Light, 40W, Standard, Square Edge Lit Type	3000K	3360lm	595*595	>80	595	595	9.6	PBLM03403-EX
LED 2X2 Base Light, 40W, Standard, Square Edge Lit Type	4000K	3600lm	595*595	>80	595	595	9.6	PBLM03404-EX
LED 2X2 Base Light, 40W, Standard, Square Edge Lit Type	6500K	3600lm	595*595	>80	595	595	9.6	PBLM03407-EX






Flood Light

Aesthetically designed LED flood light luminaire with pressure die-cast housing, specially designed heat sink with energy efficient electronic driver.

Input Voltage: 220-240V AC
P.F ≥ 0.9
High Surge Protection: 3 KV
CRI: Ra≥80
LED Life: 30,000 BH
Aluminium housing

- Anti-glare Diffuser
- Excellent CRI
- Robust Design
- Long Life
- Eco-friendly
- Zero Maintenance
- No UV & IR Radiation
- No Mercury
- For indoor use only

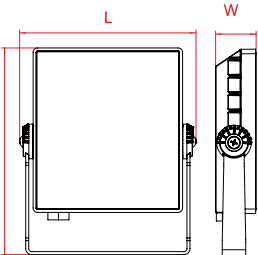

L = Length W = Width H = Height

Application areas

- Sign Board
- Buildings
- Shop Boards
- Industries



Wattage	Product Description	CCT	Lumen output	P.F	Dimension (mm)			Product code
					L	W	H	
10 W	10W Flood Light	3000K	810	0.9	134	28	159	PFLM05103
	10W Flood Light	5700K	900	0.9	134	28	159	PFLM05106
20 W	20W Flood Light	3000K	1620	0.9	167	36	220	PFLM05203
	20W Flood Light	5700K	1800	0.9	167	36	220	PFLM05206
30 W	30W Flood Light	3000K	2430	0.9	167	36	220	PFLM05303
	30W Flood Light	5700K	2700	0.9	167	36	220	PFLM05306
50 W	50W Flood Light	3000K	4050	0.9	222	38	301	PFLM05503
	50W Flood Light	5700K	4500	0.9	222	38	301	PFLM05506

